PROLEDA™ Led Lighting Technology

OUTDOOR LIGHTING
LUMINAIRE SERIES

FLOODLIGHT

VELA-M






IP 66 IK 10

Technicial Specifications


Housing	: Aluminum Injection
Light Source	: Mid Power Led / Power Led
Input Voltage	: 220-240V AC 50/60Hz
CRI	: >80
IP	: IP66
Diffuser	: Tempered Glass / Polycarbonate
Colour Temperature	: 3000K / 4000K / 5000K / 6500K
Operating Temperature	: -40°C … +55°C
Optic	: 30°/45°/60°/90°/120°/ASYM
Weight	: 2,5kg
Ral Code	: Ral 7021

POWER	STANDARD LUMEN	PRO SERIES LUMEN
100W	13.130lm	14.240lm
150W	19.650lm	21.150lm


Photometric Data




30°



60°




90°



120°

Technical Drawing

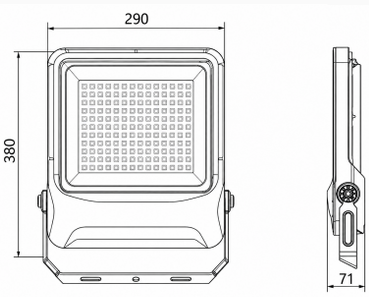

Dimensions (mm)

a	b	c
290mm	380mm	71mm

Options

Driver: Dali / 1-10V / AUTODIM

Parafodr

Technical values have ±5% tolerance.

KARİNA