OUTDOOR LIGHTING
LUMINAIRE SERIES

ROAD LIGHTING

ADEN

IP 66 IK 10






PROLEDA™ Led Lighting Technology

Technicial Specifications


Housing	: Aluminum Injection
Light Source	: Power Led / Mid Power Led
Input Voltage	: 220-240V AC 50/60Hz
CRI	: >80
IP	: IP66
Diffuser	: Tempered Glass
Colour Temperature	: 3000K / 4000K / 5000K / 6500K
Operating Temperature	: -40°C … +55°C
Optic	: 120°/ASYM
Weight	: 4,5kg
Ral Code	: Ral 7021

POWER	STANDARD LUMEN	PRO SERIES LUMEN
65W	8.632lm	9.111lm
80W	10.640lm	11.274lm
100W	13.236lm	14.020lm
125W	16.375lm	17.525lm
150W	19.656lm	21.180lm
180W	23.634lm	25.416lm

Photometric Data




120°



ASYMMETRIC

Technical Drawing

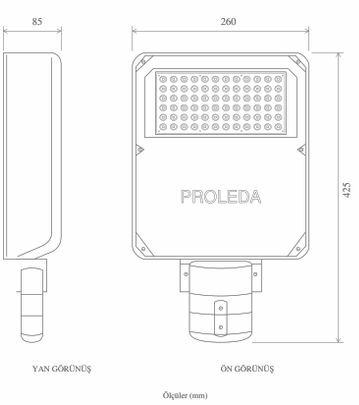

Dimensions (mm)

a	b	c
260mm	425mm	85mm

Options

Driver: Dali / 1-10V / AUTODIM

Parafodr

Technical values have ±5% tolerance.

KARİNA