PROLEDA™
Led Lighting Technology

INDUSTRIAL LIGHTING LUMINAIRE SERIESES

HIGH BAY LIGHTING

LAVA-X

IP 66 IK 10






Technicial Specifications


Housing	: Aluminum Injection
Light Source	: Power Led / Mid Power Led
Input Voltage	: 220-240V AC 50/60Hz
CRI	: >80
IP	: IP66
Diffuser	: Tempered Glass
Colour Temperature	: 3000K / 4000K / 5000K / 6500K
Operating Temperature	: -40°C … +55°C
Optic	: 12°/25°/30°/45°/60°/90°/120°/ASYM
Weight	: 5,5kg
Ral Code	: Ral 7021

POWER	STANDART LUMEN	PRO SERIES LUMEN
75W	9.900lm	10.655lm
100W	13.450lm	14.220lm
125W	16.625lm	17.687lm
150W	20.100lm	21.280lm


Photometric Data




30°



60°




90°



120°

Technical Drawing

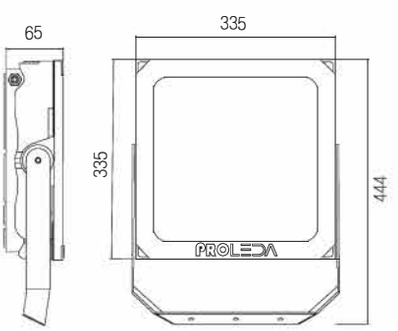

Dimensions (mm)

a	b	c
335mm	335mm	65mm

Options

Driver: Dali / 1-10V / AUTODIM

Parafodr

Technical values have ±5% tolerance.

KARİNA