
PROLEDA™
Led Lighting Technology

INTERIOR LIGHTING
LUMINARIE SERIES

SURFACE MOUNTED LINEER LUMINARIES

PUNTEL

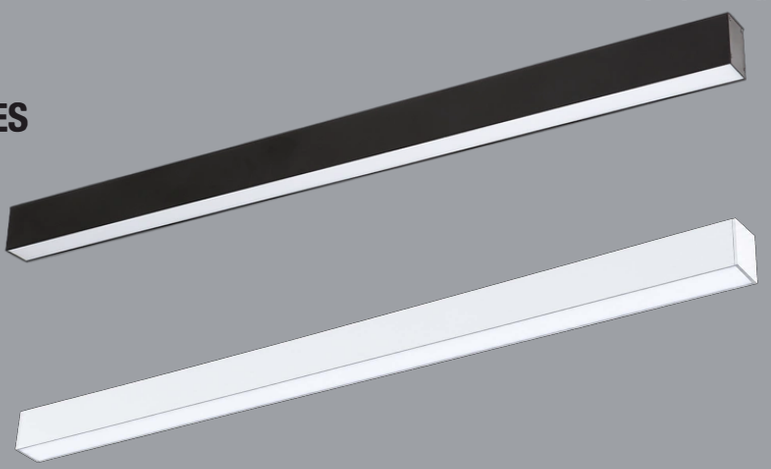


IP 20 IK 09

Technicial Specifications

Housing	: Aluminum Profile
Light Source	: Mid Power Led
Input Voltage	: 220-240V AC 50/60Hz
CRI	: >80
IP	: IP20
Diffuser	: Opal Diffuser
Colour Temperature	: 3000K / 4000K / 5000K / 6500K
Operating Temperature	: -40°C … +55°C
Ral Code	: Ral 9016
Ceiling Type	: Stalactite / Surface Mounted


DIMENSIONS	POWER	STANDART LUMEN	WEIGHT
50cm	18W	2.018lm	0,90kg
100cm	30W	3.218lm	1,65kg
100cm	42W	4.452lm	1,65kg
150cm	55W	5.940lm	2,50kg
200cm	60W	6.492lm	3,20kg
300cm	90W	9.654lm	4,95kg

Photometric Data



120°

Technical Drawing

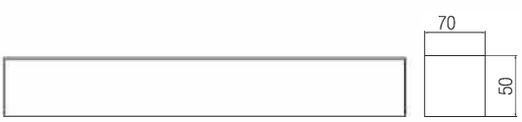

Options

Driver	: Dali / 1-10V
Emergency Kit	: 1hr / 3 hr
Sensor	: Motion
Ral Code	: Optional Ral Codes
Dimensions	: Specific Dimensions

Technical values have ±5% tolerance.

KARİNA