

INTERIOR LIGHTING  
LUMINARIE SERIES  
**SURFACE MOUNTED BACKLIGHT  
PANEL LUMINARIES**

# ORSA-S



60X60




## Technical Specifications


Housing	: Metal
Light Source	: Mid Power Led
Input Voltage	: 220-240V AC 50/60Hz
CRI	: >80
IP	: IP54
Diffuser	: Opal Diffuser
Colour Temperature	: 3000K / 4000K / 5000K / 6500K
Operating Temperature	: -40°C ... +55°C
Ral Code	: Ral 9016

DIMENSIONS	POWER	LUMEN	WEIGHT
60x60	30W	3.754lm	3,25kg
60x60	42W	5.255lm	3,25kg

## Photometric Data

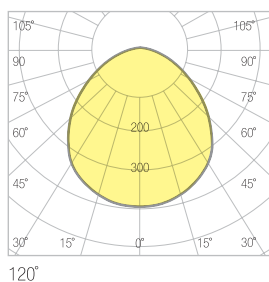

## Technical Drawing

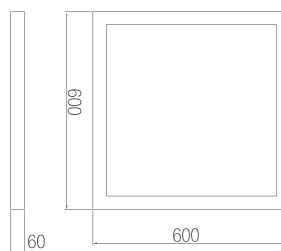

## Options


Driver	: Dali / 1-10V
Emergency Kit:	1hr / 3 hr
Sensor	: Motion
Ral Code	: Optional Ral Codes

## Dimensions (mm)

a	b	c
600mm	600mm	60mm

INTERIOR LIGHTING  
LUMINARIE SERIES  
**SURFACE MOUNTED BACKLIGHT  
PANEL LUMINARIES**

# ORSA-S

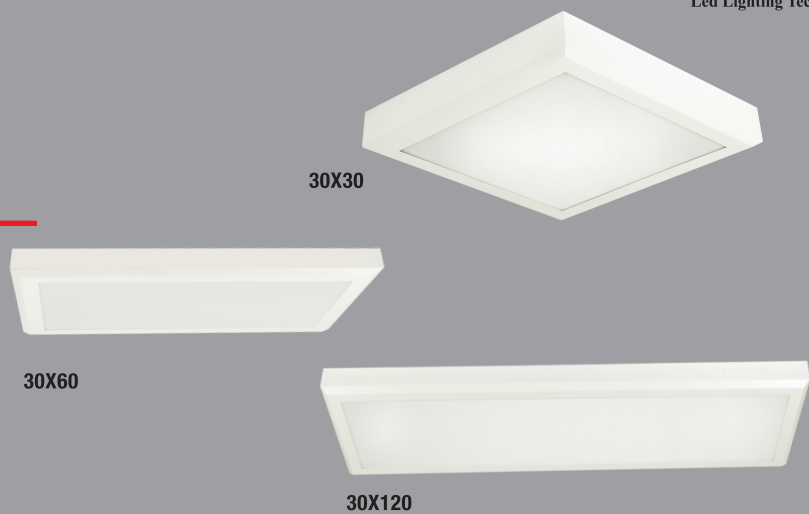


## Technical Specifications


Housing	: Metal
Light Source	: Mid Power Led
Input Voltage	: 220-240V AC 50/60Hz
CRI	: >80
IP	: IP54
Diffuser	: Opal Diffuser
Colour Temperature	: 3000K / 4000K / 5000K / 6500K
Operating Temperature	: -40°C ... +55°C
Ral Code	: Ral 9016

DIMENSIONS	POWER	LUMEN	WEIGHT
30x30	15W	1.862lm	1,20kg
30x60	15W	1.891lm	2,25kg
30x120	30W	3.512lm	4,50kg
30x120	42W	4.024lm	4,50kg

## Photometric Data

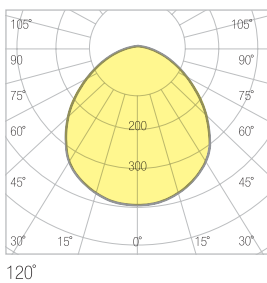

## Technical Drawing

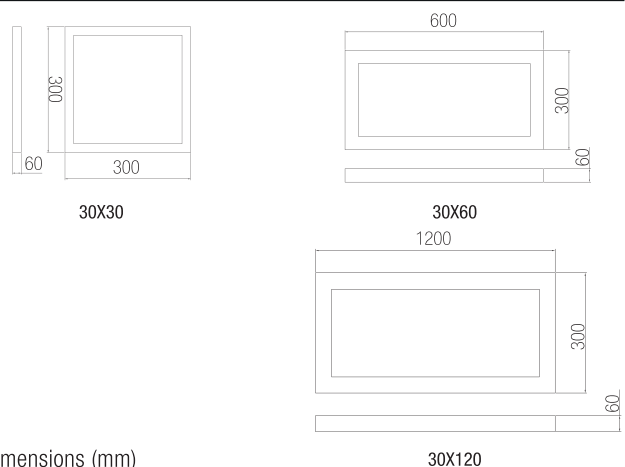

## Options

Driver	: Dali / 1-10V
Emergency Kit:	1hr / 3 hr
Sensor	: Motion
Ral Code	: Optional Ral Codes

## Dimensions (mm)

	a	b	c
30x30	300mm	300mm	60mm
30x60	300mm	600mm	60mm
30x120	300mm	1200mm	60mm